

AN7322/S



'Live' IC for PRC & Stereo Headphone Player

■ Description


The AN7322/S are the monolithic integrated circuits designed for use in PRC & Stereo Headphone Player. Signals from channel 1 and channel 2 are processed and mixed to produced a Live Effect output, centred at the frequency of 400Hz, with 3 different gain modes. Built-in switches allow the selection of Live OFF, Middle and Heavy effect.

■ Features

- Few external components.
- Selection modes : Live OFF, Middle and Heavy
- Built-in switches can be controlled by microprocessor

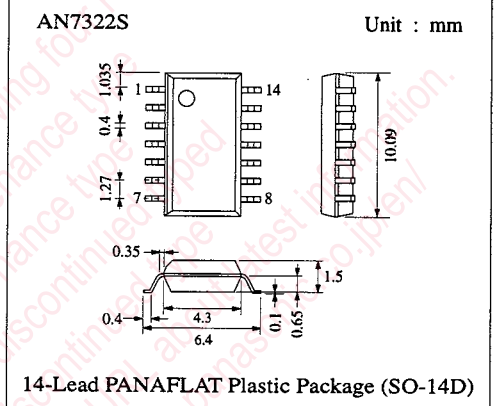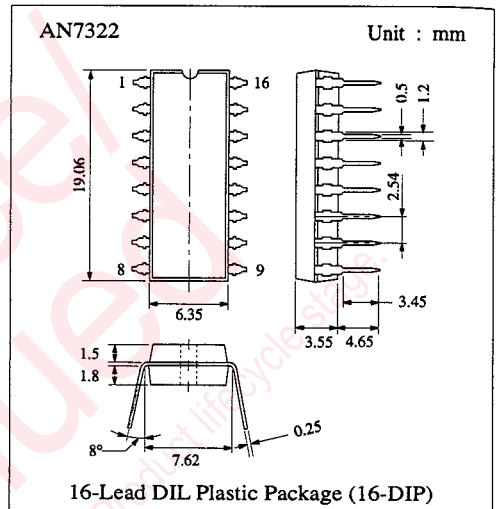

■ Block Diagram

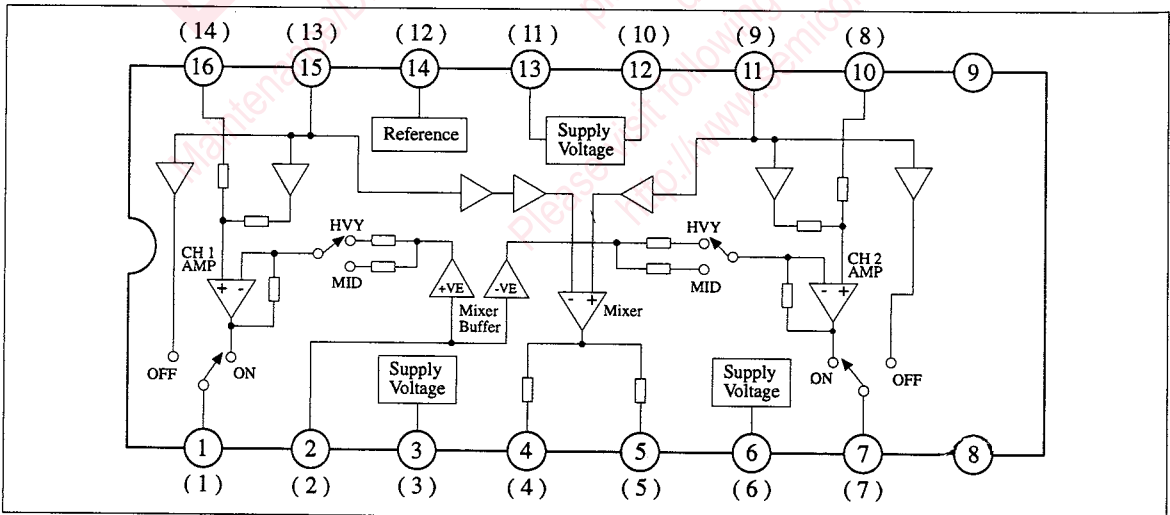

■ Absolute Maximum Ratings (Ta=25°C)

Item	Symbol	Rating	Unit
Supply Voltage	V _{CC}	14	V
Supply Current	I _{CC}	30	mA
Power Dissipation *1	P _D	420	mW
Power Dissipation *2	P _D	351	mW
Operating Ambient Temperature	Topr	-20 ~ +75	°C
Storage Temperature *1	Tstg	-55 ~ +150	°C
Storage Temperature *2	Tstg	-55 ~ +125	°C

Operating Supply Voltage Range: V_{CC} = 1.8V ~ 6.9V

*1 For DIL-16 Pin Plastic Package.

*2 For DIL-14 Pin Plastic Package (SO-Type).

■ Electrical Characteristics (V_{CC}=3V, f=1kHz, Ta=25°C)

Item	Symbol	Condition	min.	typ.	max.	Unit
Total Current	I _{tot}	V _{sw} = V _{in} = 0 V	3.0	4.3	5.0	mA
Ripple Rejection	RR	V _{ripple} = - 20 dBv, V _{sw} =0V, f=100Hz	35	45	-	dB
Channel 1 (Live Off)		V _{sw} = 0 V				
Path Gain	G _{v1}	V _{in1} = 100mV	-1	0	1.5	dB
Maximum Output voltage	V _{om1}	THD = 1 %	0.15	0.25	-	V
Total Harmonic Distortion *1	THD ₁	V _{o1} = 0.1 Vrms	-	0.15	0.5	%
Output Noise Voltage *1	V _{no1}	V _{in1} = 0 V	-	40	80	μV
Channel Separation	CS	V _{in1} = 100mV, Measure V _{out2}	35	45	-	dB
Channel Balance	CB	V _{in1} =V _{in2} =100mV	-1	0	1	dB
Channel 1 (Live Mid)		V _{sw} = 1.5V				
Total Harmonic Distortion *1	THD ₁	V _{o1} = 0.1 Vrms	-	0.4	1.0	%
Output Noise Voltage *1	V _{no1}	V _{in} = 0 V	-	45	90	μV
Channel 1 Mixed Gain (1)	G _{vm1}	V _{in1} = 100mV, f = 400Hz	1.5	2.5	3.5	dB
Channel 2 Mixed Gain (2)	G _{vm2}	V _{in1} =100mV, f=400Hz, Measure V _{out2}	-8.0	-6.0	-4.0	dB
Channel 1 (Live Hvy)		V _{sw} = 3 V				
Total Harmonic Distortion *1	THD ₁	V _{o1} = 0.1 Vrms	-	0.4	1.0	%
Output Noise Voltage *1	V _{no1}	V _{in} = 0 V	-	60	100	μV
Channel 1 Mixed Gain (1)	G _{vm1}	V _{in1} = 100mV, f = 400Hz	4.5	5.8	7.0	dB
Channel 2 Mixed Gain (2)	G _{vm2}	V _{in1} =100mV, f=400Hz, Measure V _{out2}	0.2	1.0	1.8	dB

*1 DIN AUDIO filter used.


Note) Input only at V_{in1} and measure at V_{out1}, unless otherwise specified.

■ Pin

Pin No	Pin Name	Pin No	Pin Name
1 (1)	Channel 1 Output	9	NC
2 (2)	Mixer Input	10 (8)	Channel 2 Filter
3 (3)	Vcc	11 (9)	Channel 2 Input
4 (4)	Mixer Output 1	12 (10)	Ground
5 (5)	Mixer Output 2	13 (11)	Ripple Filter
6 (6)	Live switch	14 (12)	Reference Voltage
7 (7)	Channel 2 Output	15 (13)	Channel 1 Input
8	NC	16 (14)	Channel 1 Filter

Note) 1. The Ripple Filter pin is weaker in the surge of negative side than other pins.
 2. The pin number in the bracket are for AN7322S.

■ Application Circuit

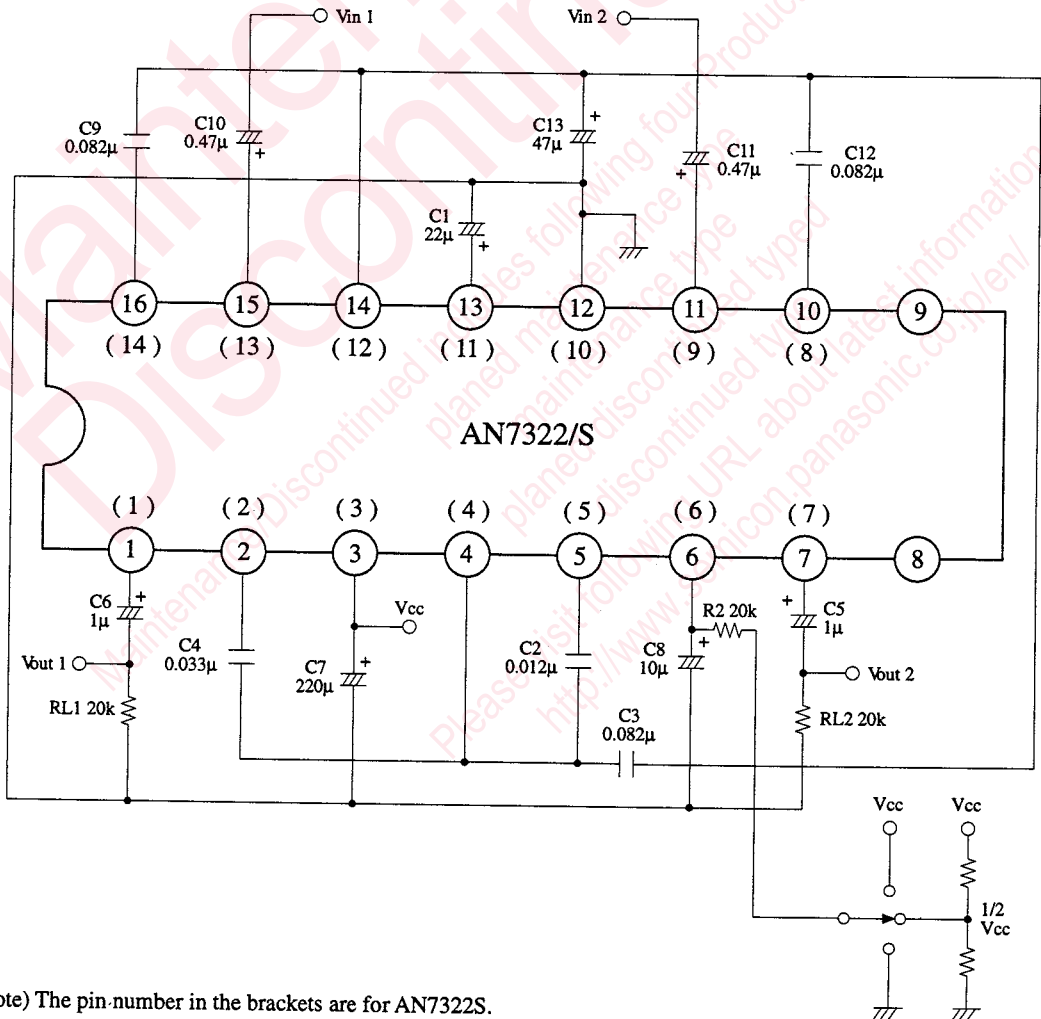

Note) The pin-number in the brackets are for AN7322S.

■ Pin Descriptions

Pin No.	Pin Name	DC Bias Voltage	Equivalent Circuit	Description
1, 7 (1, 7)	Output	1.63		'LIVE' ON & OFF Output pin. Output impedance ≈ 2.6kΩ
2 (2)	Mixer In	1.65		<p>These 3 pins are used for high frequency cut for the mixed signal. The mixed signal is feedback to the L-Ch & R-Ch output amplifier respectively.</p> $f_1 = \frac{1}{2\pi R_1 C_2} \quad f_2 = \frac{1}{2\pi (R_1/R_2) C_2}$ <p>NB : f₁ & f₂ can be varied by varying C₂ externally.</p>
4 (4)	Mixer Out 1	1.68		
5 (5)	Mixer Out 2	1.68		
3 (3)	Vcc			
6 (6)	'LIVE' Switch			<p>This pin select 'LIVE' OFF, MID & HVY.</p> <p>'LIVE' OFF (DC) = 0V 'LIVE' MID (DC) = 1/2 Vcc 'LIVE' HVY (DC) = Vcc</p>
10, 16 (8, 14)	Filter	0.95		These 2 pins are for low frequency cut before the original signal is mix with the mixed signal at the output amplifier.

Note) The pin number in brackets are for AN7322S.

■ Pin Descriptions (Continue)

Pin No.	Pin Name	DC Bias Voltage	Equivalent Circuit	Description
11, 15 (9, 13)	Input	1.65		These are the inputs to the IC. These inputs can be from PRE & VOL block. I/P impedance $\approx 30k\Omega$
12 (10)	GND			
13 (11)	Ripple Filter	1.67		Connect with a capacitor to minimize ripple from Vcc.
14 (12)	Reference Voltage	1.67		This pin provide a fixed DC bias. The capacitor connect externally is to minimize oscillation.
8, 9	NC			

Note) The pin number in brackets are for AN7322S.



■ Supplementary Explanation

● Application Notes



This IC provides a 'LIVE' effect for stereo signal. It is situated between Pre-amplifier and Power amplifier. Signals from Left and Right channels are mixed to a certain level and this provides an ambient effect to the audible signal.

Below are 2 application examples of this IC.

(1) Application 1

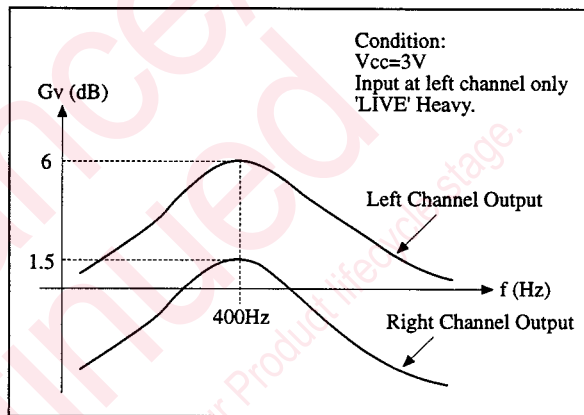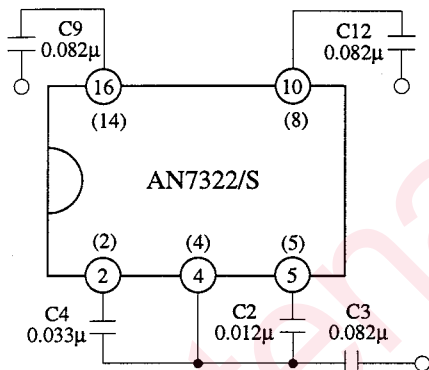

(2) Application 2

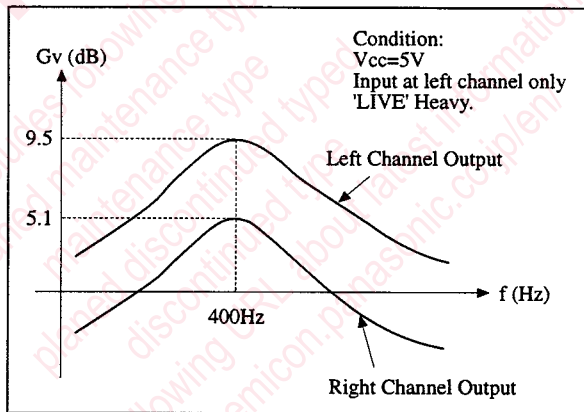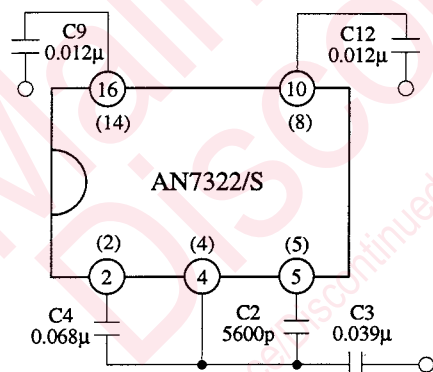

Other than the values shown above, the rest of the components values are the same as application circuit. With the set of values shown above, this IC will give the same type of characteristics curve as the Application 1 except that the gain is higher. The characteristics curve are as shown on the above right diagram. All the above characteristics curves are for 'LIVE' HEAVY only. In the MID position, the characteristics curve are the same as HEAVY except for the gain. The gain for both 'LIVE' Mid and Heavy at 400Hz are as follows :-


'LIVE' MID	Application 1	Application 2
Left Channel Output	3dB	5.6dB
Right Chanel Output	-5.6dB	-2dB

'LIVE' HEAVY	Application 1	Application 2
Left Channel Output	6dB	9.5dB
Right Chanel Output	1.5dB	5.1dB


Note) The pin number in the brackets are for AN7322S.

■ Printed Circuit Board Layout (Scale: 1:1)

PCB artwork of AN7322

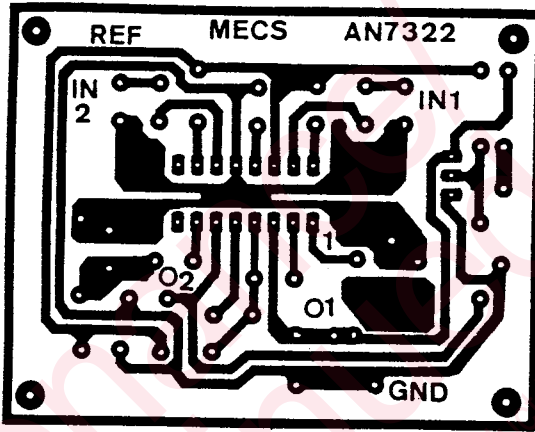

PCB artwork of AN7322S

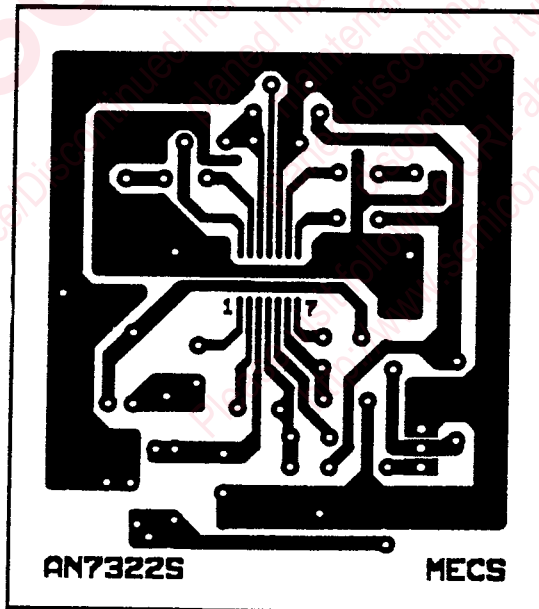

Request for your special attention and precautions in using the technical information and semiconductors described in this book

- (1) If any of the products or technical information described in this book is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially, those with regard to security export control, must be observed.
- (2) The technical information described in this book is intended only to show the main characteristics and application circuit examples of the products. No license is granted in and to any intellectual property right or other right owned by Panasonic Corporation or any other company. Therefore, no responsibility is assumed by our company as to the infringement upon any such right owned by any other company which may arise as a result of the use of technical information described in this book.
- (3) The products described in this book are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).
Consult our sales staff in advance for information on the following applications:
 - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
 - Any applications other than the standard applications intended.
- (4) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the range of absolute maximum rating and the guaranteed operating conditions (operating power supply voltage and operating environment etc.). Especially, please be careful not to exceed the range of absolute maximum rating on the transient state, such as power-on, power-off and mode-switching. Otherwise, we will not be liable for any defect which may arise later in your equipment.
 - Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (6) Comply with the instructions for use in order to prevent breakdown and characteristics change due to external factors (ESD, EOS, thermal stress and mechanical stress) at the time of handling, mounting or at customer's process. When using products for which damp-proof packing is required, satisfy the conditions, such as shelf life and the elapsed time since first opening the packages.
- (7) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of our company.