




# BYW29, BYWF29, BYWB29 Series


Vishay Semiconductors  
formerly General Semiconductor

## Ultrafast Rectifiers


Reverse Voltage 50 to 200V  
Forward Current 8.0A  
Reverse Recovery Time 25ns

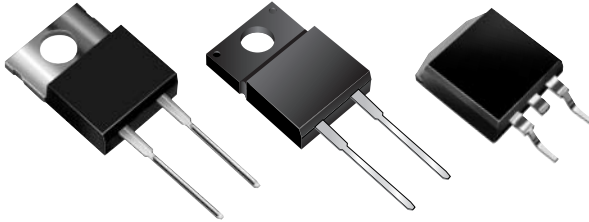


### TO-220AC (BYW29 Series)

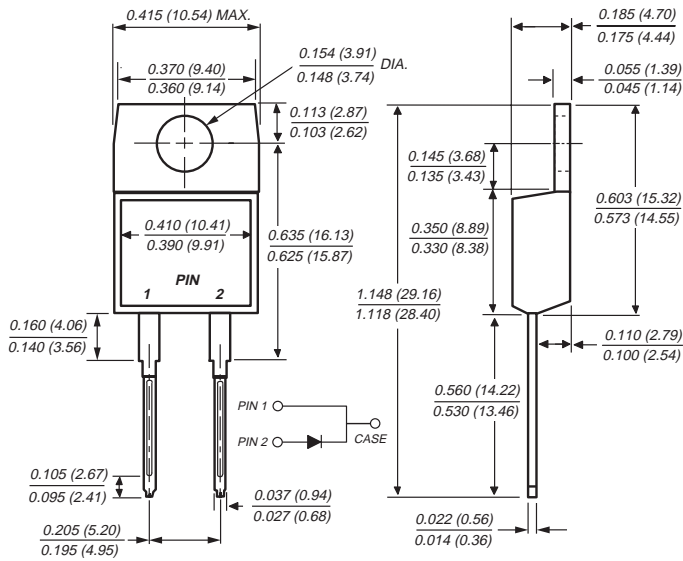


### Mounting Pad Layout TO-263AB

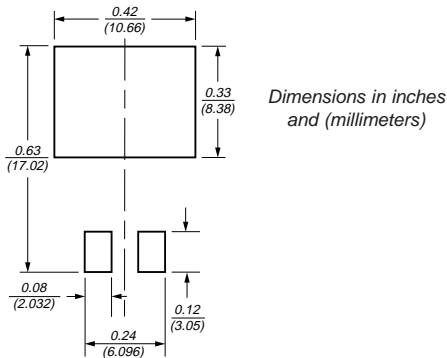

### ITO-220AC (BYWF29 Series)

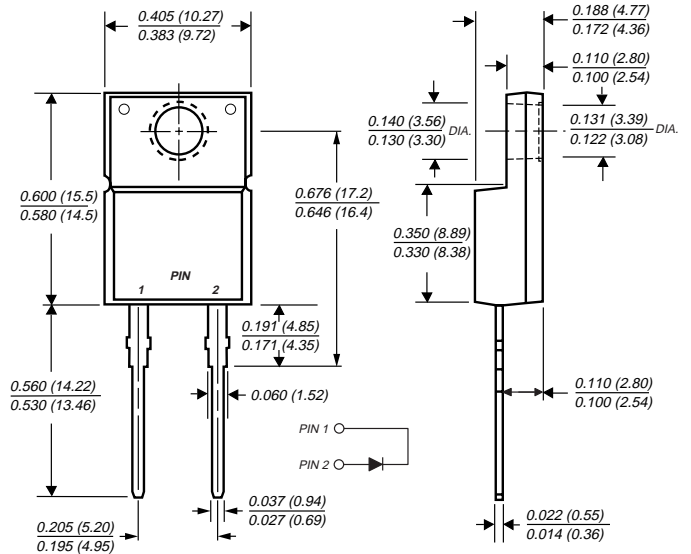

### TO-263AB (BYWB29 Series)

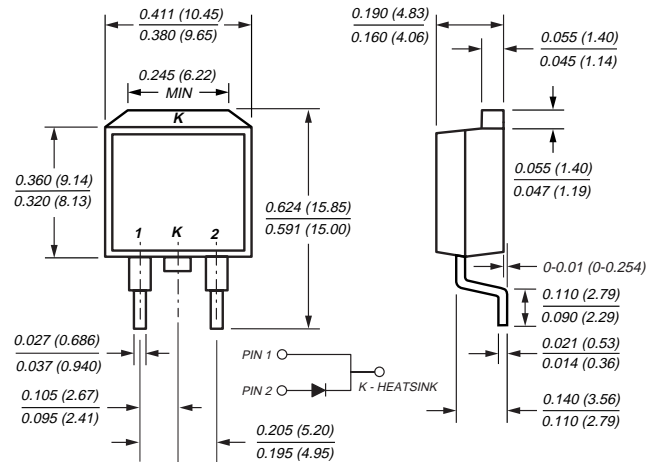

## Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Glass passivated chip junction
- Low power loss
- Low leakage current
- High surge current capability
- Superfast recovery time for high efficiency

## Mechanical Data

**Case:** JEDEC TO-220AC, ITO-220AC & TO-263AB molded plastic body

**Terminals:** Plated leads, solderable per MIL-STD-750, Method 2026

High temperature soldering in accordance with CECC 802 / Reflow guaranteed

**Polarity:** As marked

**Mounting Position:** Any

**Mounting Torque:** 10 in-lbs maximum

**Weight:** approx. 0.05 oz., 1.35 g

# BYW29, BYWF29, BYWB29 Series



Vishay Semiconductors  
formerly General Semiconductor

## Maximum Ratings (T<sub>C</sub> = 25°C unless otherwise noted)

Parameter	Symbol	BYW29-50	BYW29-100	BYW29-150	BYW29-200	Unit
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	50	100	150	200	V
Maximum RMS voltage	V <sub>RMS</sub>	35	70	105	140	V
Maximum DC blocking voltage	V <sub>DC</sub>	50	100	150	200	V
Maximum average forward rectified current at T <sub>C</sub> = 105°C	I <sub>F(AV)</sub>	8.0				A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) per leg	I <sub>FSM</sub>	100				A
Operating and storage temperature range	T <sub>J</sub> , T <sub>STG</sub>	-65 to +150				°C
RMS Isolation voltage (BYWF type only) from terminals to heatsink with t = 1.0 second, RH ≤ 30%	V <sub>ISOL</sub>	4500 <sup>(1)</sup> 3500 <sup>(2)</sup> 1500 <sup>(3)</sup>				V

## Electrical Characteristics (T<sub>C</sub> = 25°C unless otherwise noted)

Parameter	Symbol	BYW29-50	BYW29-100	BYW29-150	BYW29-200	Unit
Maximum instantaneous forward voltage at: <sup>(4)</sup> I <sub>F</sub> = 20A, T <sub>J</sub> = 25°C I <sub>F</sub> = 8.0A, T <sub>J</sub> = 150°C	V <sub>F</sub>	1.3 0.8				V
Maximum DC reverse current at rated DC blocking voltage T <sub>C</sub> =25°C T <sub>C</sub> =100°C	I <sub>R</sub>	10 500				μA
Maximum reverse recovery time at I <sub>F</sub> = 1A, V <sub>R</sub> = 30V, di/dt = 100A/μs, I <sub>rr</sub> = 10% I <sub>RM</sub>	t <sub>rr</sub>	25				ns
Typical junction capacitance at 4V, 1MHz	C <sub>J</sub>	45				pF

## Thermal Characteristics (T<sub>C</sub> = 25°C unless otherwise noted)

Parameter	Symbol	BYW	BYWF	BYWB	Unit
Typical thermal resistance from junction to case per leg	R <sub>θJC</sub>	2.5	5.5	2.5	°C/W


### Notes:

- (1) Clip mounting (on case), where lead does not overlap heatsink with 0.110" offset
- (2) Clip mounting (on case), where leads do overlap heatsink
- (3) Screw mounting with 4-40 screw, where washer diameter is ≤ 4.9mm (0.19")
- (4) Pulse test: 300μs pulse width, 1% duty cycle




**Ratings and Characteristic Curves** ( $T_A = 25^\circ\text{C}$  unless otherwise noted)


**Fig. 1 – Maximum Forward Current Derating Curve**

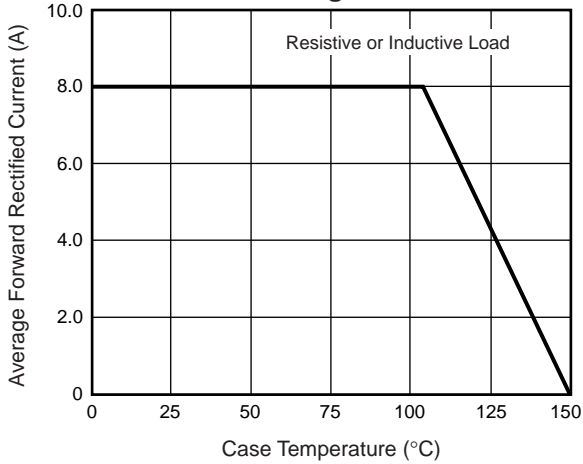


**Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current**

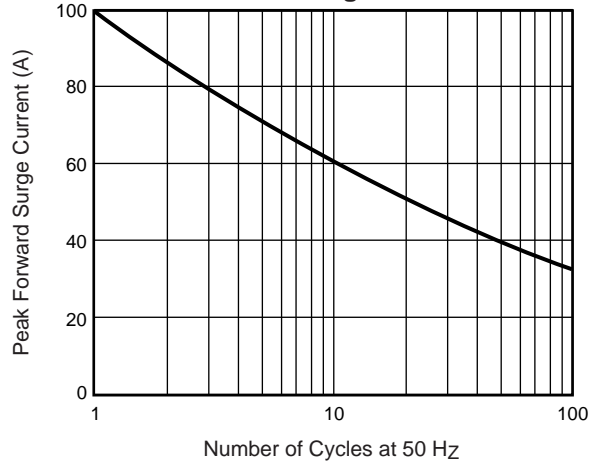


**Fig. 3 – Typical Instantaneous Forward Characteristics**

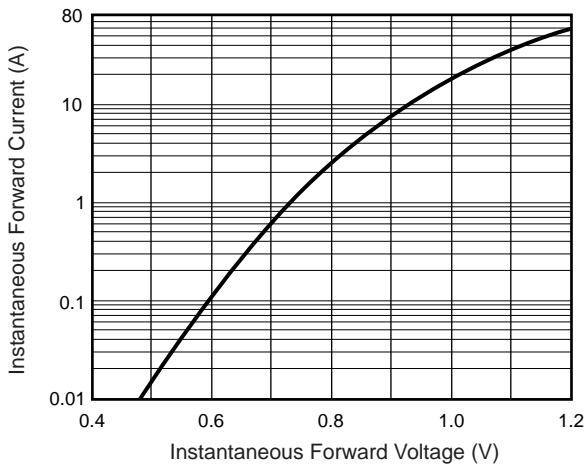

**Fig. 4 – Typical Reverse Leakage Characteristics**

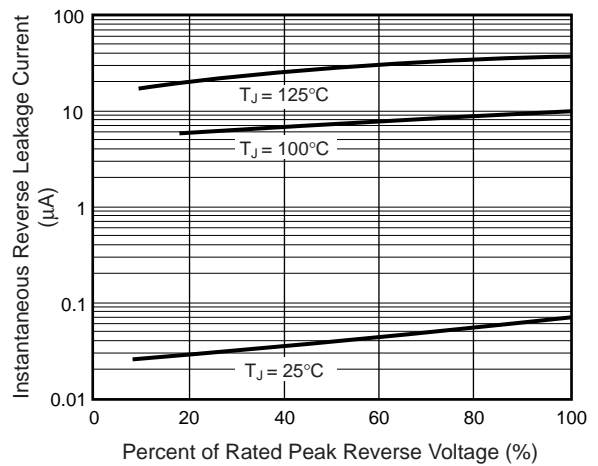

**Fig. 5 – Typical Junction Capacitance**

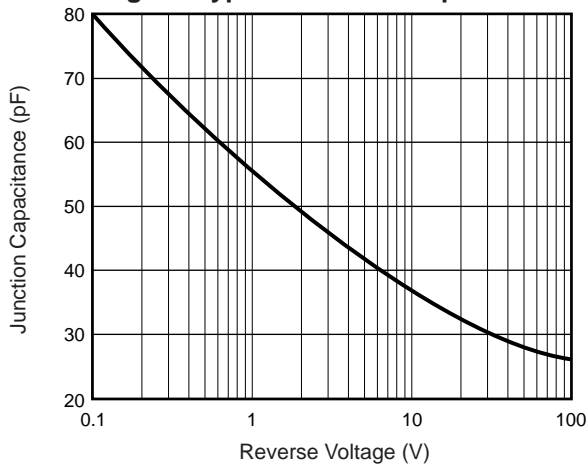



## Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.