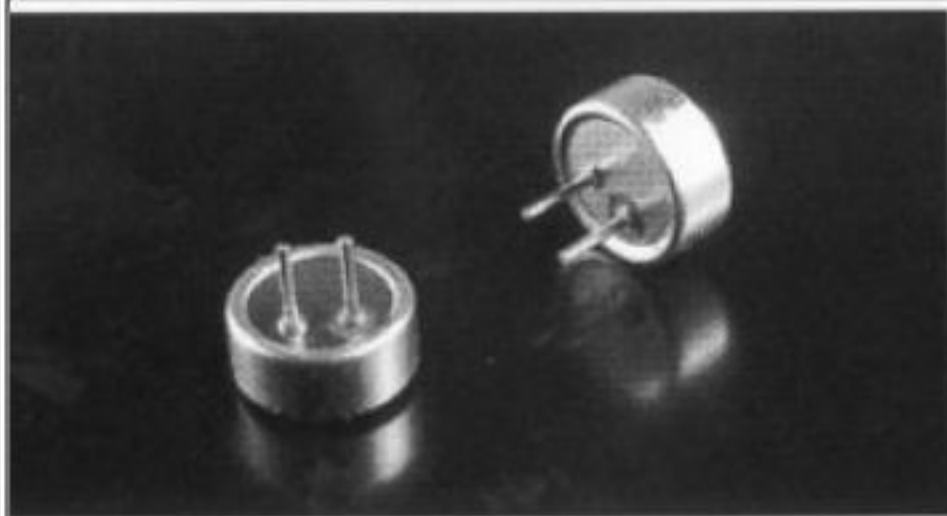
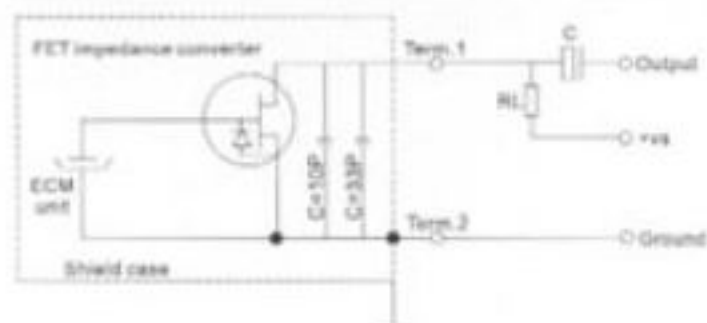


Schematic Diagram($V_s=2V$, $R_L=2.2K\Omega$)


Sensitivity (1kHz, 0dB=1V/Pa)

$-46\pm 2\text{dB}$	$-44\pm 2\text{dB}$	$-42\pm 2\text{dB}$
$-40\pm 2\text{dB}$	$-38\pm 2\text{dB}$	$-36\pm 2\text{dB}$

Specifications

Impedance:	Less than $2.2k\Omega$
Directivity:	Omnidirectional
Frequency:	20-16,000Hz
Standard operation voltage:	2V
Current consumption:	Max.0.5mA
Sensitivity reduction:	Within 3dB at 1.5V
S/N ratio	More than 58dB

Frequency Response

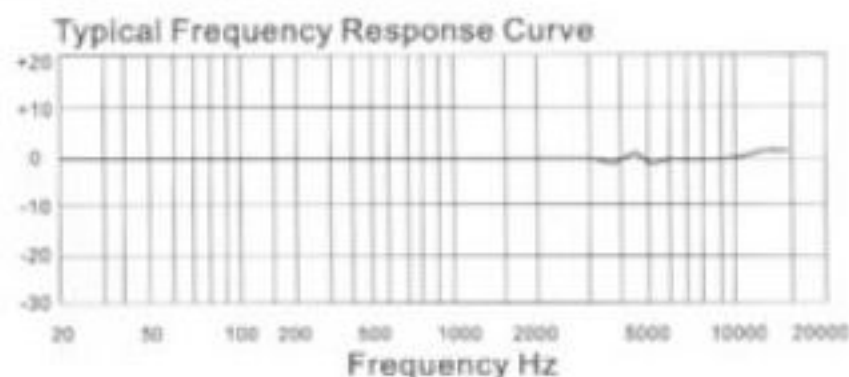

Dimensional (mm)

