

FM IF amplifier and detector

Technology: Bipolar

Features

- No selection of volume-input characteristics
- Independent sound output for VTR and headphone
- Additional sound input
- High ripple rejection
- High residual carrier suppression prevents harmonic distortions

Case: 14 pin dual inline plastic

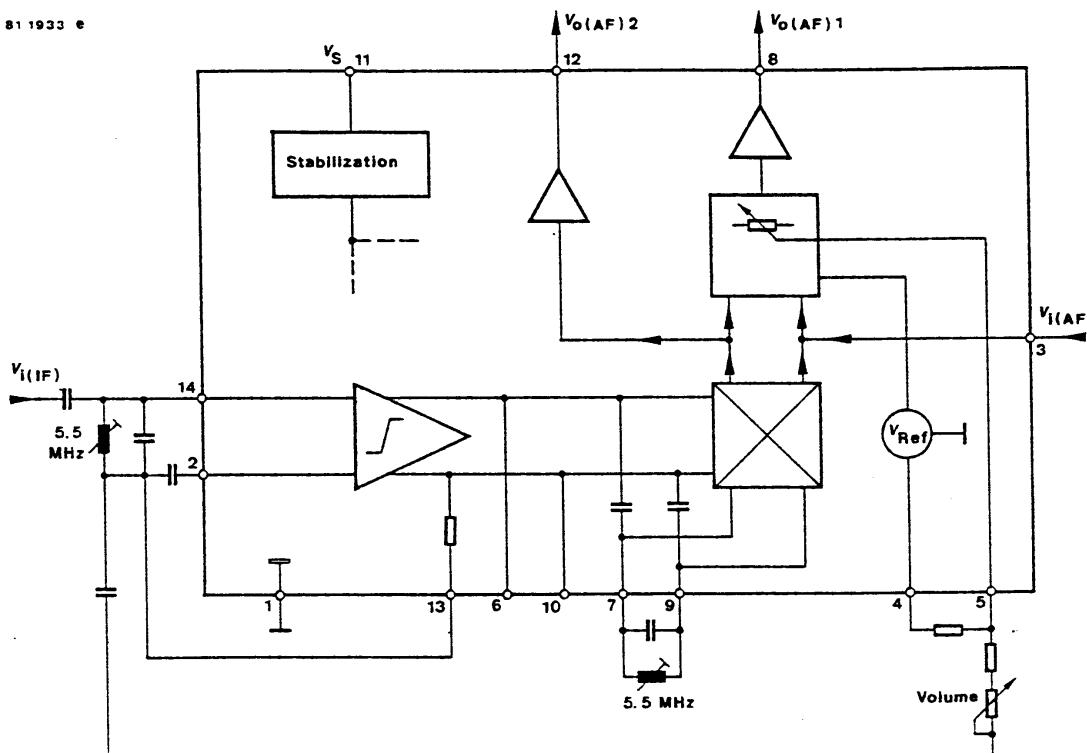


Figure 1 Block diagram

Absolute Maximum Ratings

Reference point pin 1, unless otherwise specified

Parameters	Symbol	Value	Unit
Supply voltage	V _S	18	V
Volume setting voltage	V ₅	6	V
Reference supply current	I _{Ref}	5	mA
Resistor between pin 13 and pin 14	R _p	1	kΩ
Power dissipation	P _{tot}	400	mW
Ambient temperature range	T _{amb}	-15 to +70	°C
Storage temperature range	T _{stg}	-25 to +125	°C

Electrical Characteristics $T_{amb} = +25^\circ C$, $V_S = 12 V$, $f = 5.5 \text{ MHz}$, figure 3, reference point pin 1, unless otherwise specified

Parameters	Test Conditions / Pins	Symbol	Min.	Typ.	Max.	Unit
Supply voltage range	Pin 11	V_S	10		18	V
Supply current	Pin 11	I_S	9.5		17.5	mA
Reference voltage	Pin 4	V_{oRef}	4.2	4.8	5.5	V
Output resistance	Pin 4	r_{Ref}		12		Ω
Frequency range		f		0 to 12		MHz
IF voltage amplification	Pin 6/14	G_{IF}		68		dB
IF output voltage	when limited, each output Pin 6/10	$V_{o(IF)pp}$		250		mV
Input limiting voltage	$\Delta f = \pm 50 \text{ kHz}$, $f_{mod} = 1 \text{ kHz}$, $Q \approx 45^{1)}$ Pin 14	$V_{i(IF)}$		30	60	μV
Input impedance	Pin 14	R_i C_i	15	40 4.5	6	$k\Omega$ pF
AM rejection	$\Delta f = \pm 50 \text{ kHz}$, $Q \approx 45^{1)}$, $f_{mod} = 1 \text{ kHz}$, $m = 30 \%$, $V_i = 500 \mu\text{V}$	k_{AM}	50	60		dB
DC voltage at AF output	$V_i = 0 \text{ V}$ Pin 8 Pin 12	$V_{o(AF)1}$ $V_{o(AF)2}$		4 5.6		V V
Ripple rejection	Pin 11/8 Pin 11/12	k_{Br} k_{Br}		35 30		dB dB
IF residual voltage	without de-emphasis capacitor Pin 8 Pin 12	$V_{o(IF)1}$ $V_{o(IF)2}$		20 30		mV mV
AF output voltage	$V_i = 10 \text{ mV}$, $R_5 = 20 \text{ k}\Omega$, $\Delta f = \pm 50 \text{ kHz}$, $f_{mod} = 1 \text{ kHz}$, $Q = 45^{1)}$, $k = 4\%$ $Q = 20^{1)}$, $k = 1\%$ Pin 8 Pin 12 Pin 8 Pin 12	$V_{o(AF)1}$ $V_{o(AF)2}$ $V_{o(AF)1}$ $V_{o(AF)2}$		1.3 1.0 0.65 0.5		V V V V
Input resistance	Pin 3	r_i		2		$k\Omega$
Output resistance	Pin 8, 12	r_o		1.1		$k\Omega$
AF voltage gain	$R_5 = 20 \text{ k}\Omega$	Pin 8/3	G_{v1}	7.5		dB
AF damping Fig. 3	$R_5 = 13 \text{ k}\Omega$	Pin 8	$-G_{v1}$	20	28	36
Volume setting range	Pin 8	$\Delta V_{o(AF)1}$	70	85		dB
Mute function						
Switching current	figure 2 Pin 2 or 13	I_{sw}			400	μA
Switching voltage		V_{mute}	3			V

¹⁾ Operation quality factor

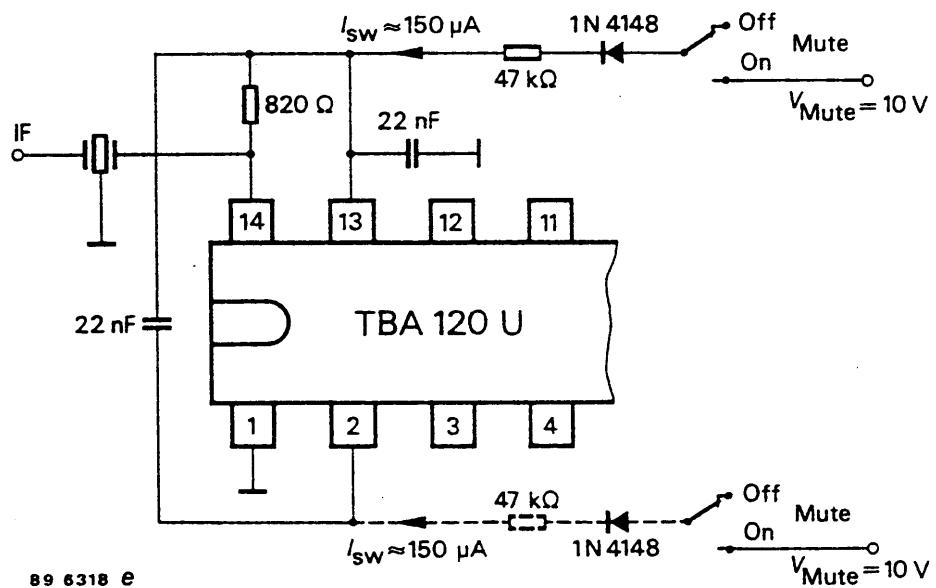


Figure 2


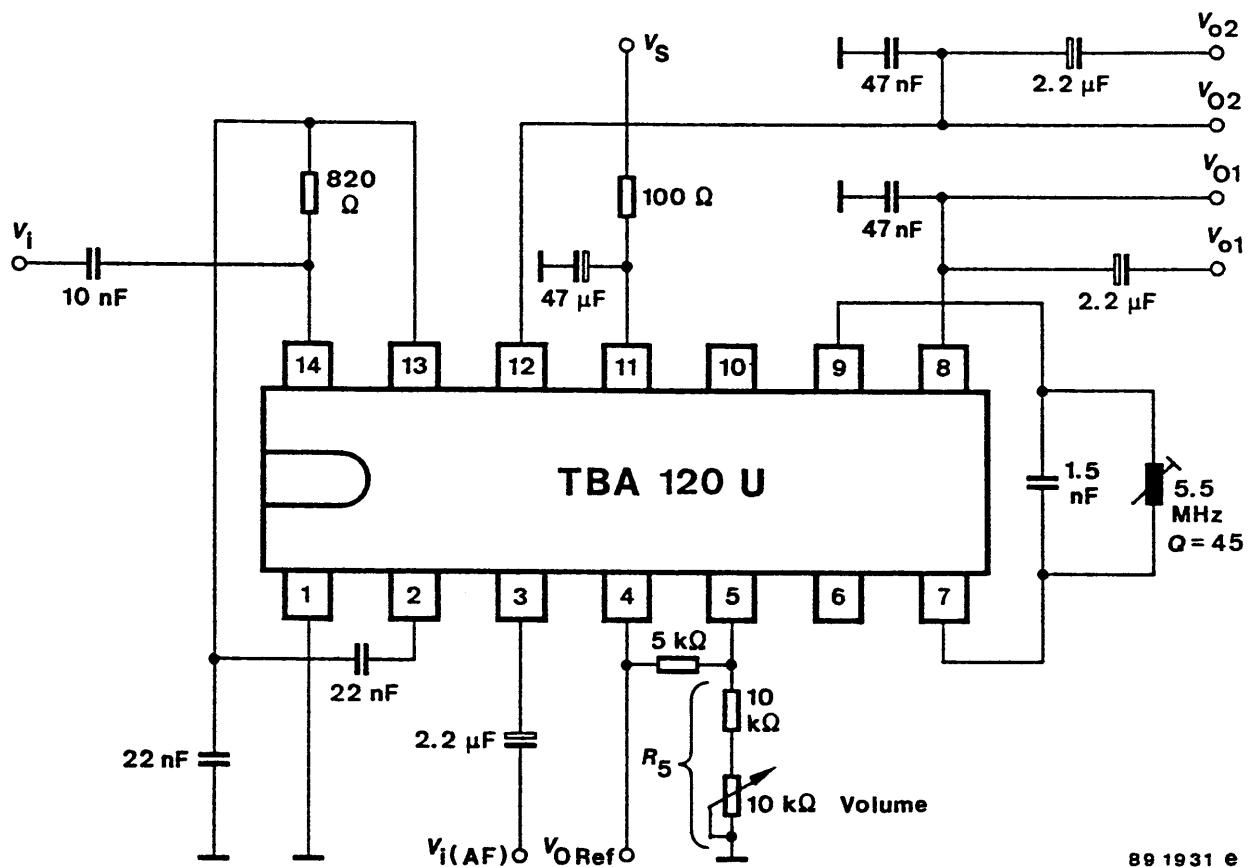


Figure 3 Test circuit

Dimensions in mm

Package: JEDEC MO 001, DIP 14

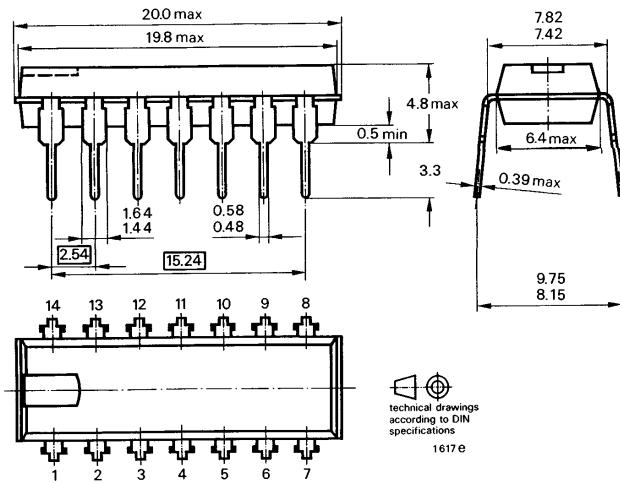

We reserve the right to make changes to improve technical design without further notice.

Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer. Should the buyer use TEMIC products for any unintended or unauthorized application, the buyer shall indemnify TEMIC against all claims, costs, damages, and expenses, arising out of, directly or indirectly, any claim of personal damage, injury or death associated with such unintended or unauthorized use.

TEMIC TELEFUNKEN microelectronic GmbH, P.O.B. 3535, D-74025 Heilbronn, Germany
Telephone: 49 (0)7131 67 2831, Fax Number: 49 (0)7131 67 2423