


JY-MOTOR RUN CAPACITOR
FOR MOTOR

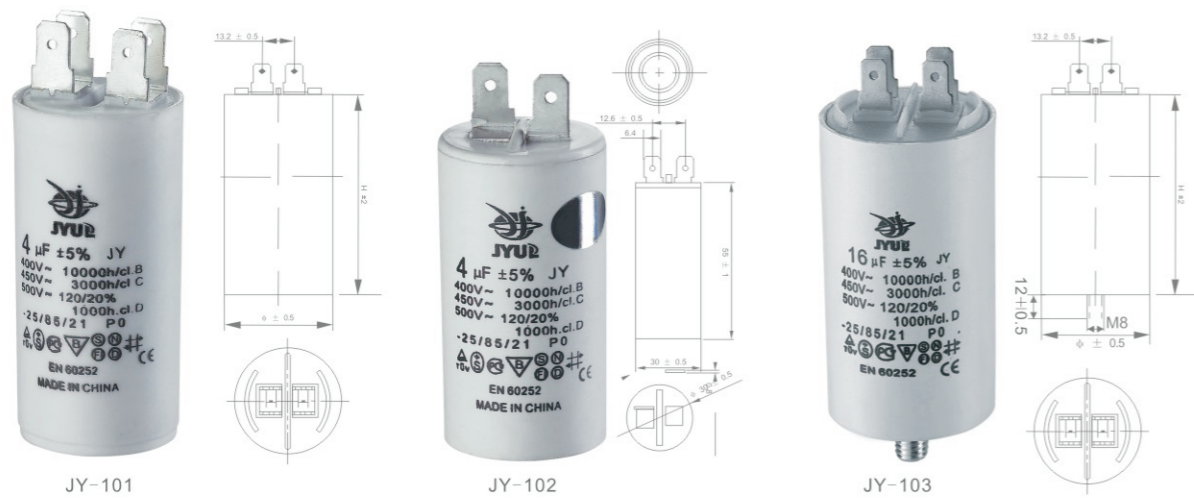

产品特点:

- 该电容器采用锌边缘加厚聚丙烯薄膜或网状安全膜为介质，阻燃环氧树脂封装而成，外形为圆柱形，具有高可靠性和高稳定性。

Product character:

- This capacitor use polypropylene film or reticulation safety film (coated by Zinc and Aluminum) as a dielectric encapsulated by retardant epoxy resin, with cylinder shape, high quality and good stability.

用途:

- 用于50/60Hz交流单相电机的启动和运转，广泛用于微型水泵、洗衣机、清洗机和空压机等。

Application:

- Apply to 50/60Hz A.C single-phase motor for starting and running. Widely used for micro water pump, cleaning machine, washing machine and air compressor etc.

技术参数 Technical Data

执行标准 Performance standard	GB/T3667.1-2005/ IEC60252-1:2001
气候类别 Climate types	25/70/21
容量偏差 Capacitance tolerance	± 5%
绝缘电阻 Insulation resistance	≥ 3000MΩ. μ F
损耗角正切 Loss Tangent	Tg δ ≤ 0.002 (50Hz-100Hz)
耐电压T-T Endurable voltage (T-T)	施加2倍的工作电压2秒钟无击穿 2times working voltage, no breakdown within 2 seconds

Dimensions(mm)

Capatitance (μ F)	250V	450V	
	DXH (mm)		
1	30×60	30×50	
1.5			
2			
2.5			
3			
4			
5			
6			30×60
7			
8			
9			35×60
10			
11			
12	35×60	35×60/35×70	
12.5			
13		35×70	
14			
15		40×70	
16		40×70	
17			
18			
20	45×70/40×93		
22		40×93/45×93	
25			
27	45×93		
30			
31.5			
35			
40	50×92		
45			
50			
55			
60			
65	50×100/50×120		
70			
75			
80	50×120/55×120		
85			
90	55×120		
100			
120	60×120		
130			
150			
150	65×130		
150			

备注：可根据客户要求的规格生产
Remarks: The specifications can be according to clients requests.

