

Micro Commercial Components

Micro Commercial Components 20736 Marilla Street Chatsworth

CA 91311

Phone: (818) 701-4933 Fax: (818) 701-4939 1N5400 THRU 1N5408

Features

- Low Current Leakage
- Low Forward Voltage
- High Current Capability
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0

3 Amp Rectifier 50 - 1000 Volts

Maximum Ratings


- Operating Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +150°C
- Maximum Thermal Resistance; 30°C/W Junction To Lead

MCC	Device	Maximum	Maximum	Maximum
Catalog	Marking	Recurrent	RMS	DC
Number		Peak	Peak Voltage	
		Reverse	_	Voltage
		Voltage		
1N5400	1N5400	50V	35V	50V
1N5401	1N5401	100V	70V	100V
1N5402	1N5402	200V	140V	200V
1N5404	1N5404	400V	280V	400V
1N5405	1N5405	500V	350V	500V
1N5406	1N5406	600V	420V	600V
1N5407	1N5407	800V	560V	V008
1N5408	1N5408	1000V	700V	1000V

Electrical Characteristics @ 25°C Unless Otherwise Specified

rectificational actoristics @ 25 c offices offici wise specific					
Average Forward Current	I _{F(AV)}	3.0A	T _a = 105°C		
Peak Forward Surge Current	I _{FSM}	200A	8.3ms, half sine		
Forward Voltage	V_{F}	1.0V	I _F = 3.0A; T _a = 25°C		
Maximum DC Reverse Current At Rated DC Blocking Voltage	I _R	5.0μA 100μA	T _a = 25°C T _a = 150°C		
Typical Junction Capacitance	C _J	40pF	Measured at 1.0MHz, V _R =4.0V		

DO-201AD




DIMENSIONS									
	INCHES		MM						
DIM	MIN	MAX	MIN	MAX	NOTE				
Α	.287	.374	7.30	9.50					
В	.189	.208	4.80	5.30					
С	.048	.052	1.20	1.30					
D	1.000		25.40						




Micro Commercial Components


Figure 1 Typical Forward Characteristics



Instantaneous Forward Current - Amperes versus Instantaneous Forward Voltage - Volts



Average Forward Rectified Current - Amperesversus Ambient Temperature - $^{\circ}$ C

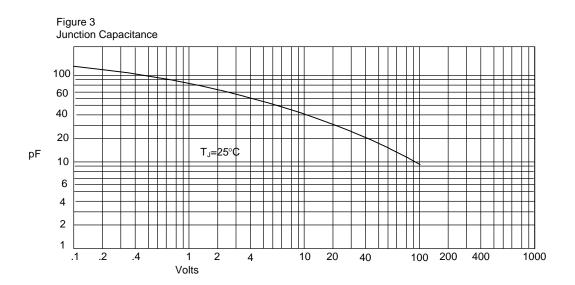


Junction Capacitance - pF*versus* Reverse Voltage - Volts

1N5400 thru 1N5408




Figure 4
Typical Reverse Characteristics



Instantaneous Reverse Leakage Current - MicroAmperesversus Percent Of Rated Peak Reverse Voltage - Volts

Micro Commercial Components



Peak Forward Surge Current - Amperesversus Number Of Cycles At 60Hz - Cycles



IMPORTANT NOTICE

Micro Commercial Components Corp. reserve the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes.
Micro Commercial Components Corp. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Micro Commercial Components Corp. and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by *Micro Commercial Components Corp* . are not intended for use in Medical,

Aerospace or Military Applications.