



Micro Commercial Components

Micro Commercial Components  
 20736 Marilla Street Chatsworth  
 CA 91311  
 Phone: (818) 701-4933  
 Fax: (818) 701-4939

# MBR2020CT THRU MBR20100CT

## 20 Amp Schottky Barrier Rectifier 20 to 100 Volts

### Features



- Meant of Silicon Rectifier, Majority Conduction
- Guard ring for transient protection
- Low Forward Voltage Drop
- High Current Capability, High Efficiency
- Marking : type number
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0

### Maximum Ratings

- Operating Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +150°C

MCC Catalog Number	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
MBR2020CT	20V	14V	20V
MBR2030CT	30V	21V	30V
MBR2035CT	35V	24.5V	35V
MBR2040CT	40V	28V	40V
MBR2045CT	45V	31.5V	45V
MBR2060CT	60V	42V	60V
MBR2080CT	80V	56V	80V
MBR20100CT	100V	70V	100V

### TO-220AB

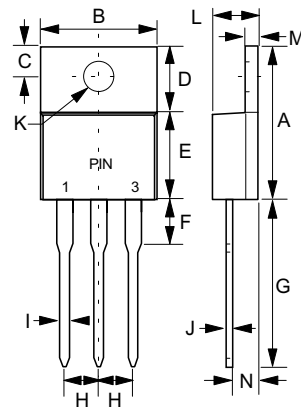

### Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current	$I_{F(AV)}$	20 A	$T_A = 120^\circ\text{C}$	
Peak Forward Surge Current	$I_{FSM}$	150A	8.3ms, half sine	
Maximum Instantaneous Forward Voltage	$V_F$	2020CT-2045CT 2060CT 2080CT-20100CT	$I_{FM} = 10A;$ $T_A = 25^\circ\text{C}^*$	
		2020CT-2045CT 2060CT 2080CT-20100CT		$I_{FM} = 20A;$ $T_A = 25^\circ\text{C}^*$
		2020CT-2045CT 2060CT 2080CT-20100CT		
		2020CT-2045CT 2060CT 2080CT-20100CT		
Maximum DC Reverse Current At Rated DC Blocking Voltage	$I_R$	2020CT-2045CT 2060CT-20100CT 2020CT-2045CT 2060CT-20100CT	$T_A = 25^\circ\text{C}$ $T_A = 125^\circ\text{C}$	
		0.1mA 0.15mA 50mA 150mA		

DIM	DIMENSIONS				NOTE
	INCHES		MM		
	MIN	MAX	MIN	MAX	
A	.560	.625	14.22	15.88	
B	.380	.420	9.65	10.67	
C	.100	.135	2.54	3.43	
D	.230	.270	5.84	6.86	
E	.380	.420	9.65	10.67	
F	-----	.250	-----	6.35	
G	.500	.580	12.70	14.73	
H	.090	.110	2.29	2.79	
I	.020	.045	0.51	1.14	
J	.012	.025	0.30	0.64	
K	.139	.161	3.53	4.09	∅
L	.140	.190	3.56	4.83	
M	.045	.055	1.14	1.40	
N	.080	.115	2.03	2.92	

\*Pulse Test: Pulse Width 300µsec, Duty Cycle 2%

[www.mccsemi.com](http://www.mccsemi.com)

# MBR2020CT thru MBR20100CT

Figure 1  
Typical Forward Characteristics

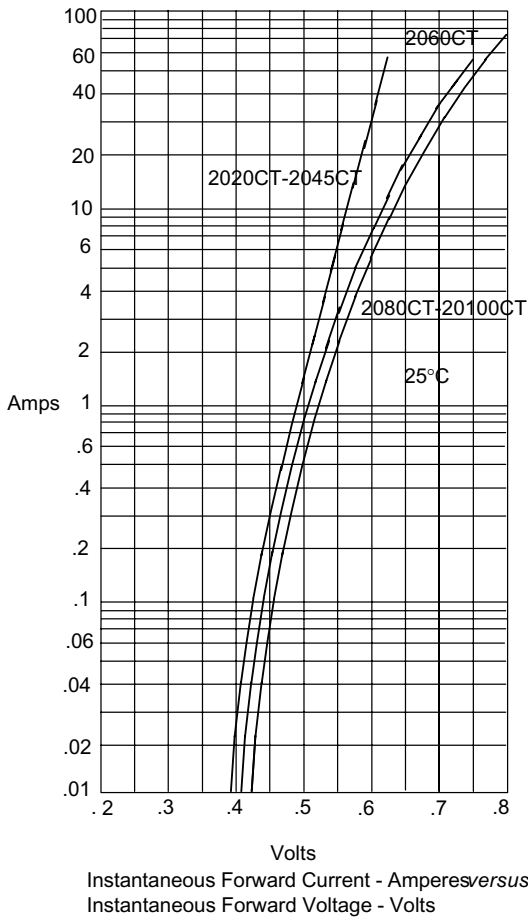


Figure 2  
Micro Commercial Components  
Typical Reverse Characteristics

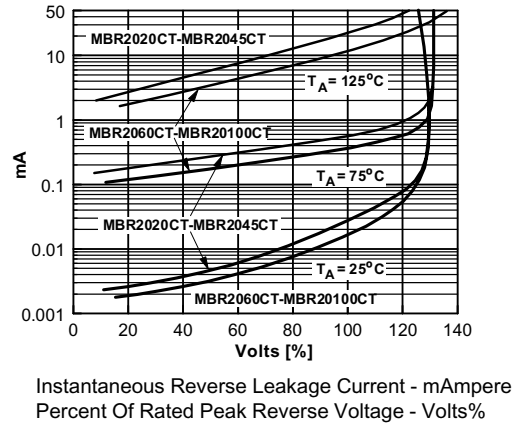


Figure 3  
Forward Derating Curve


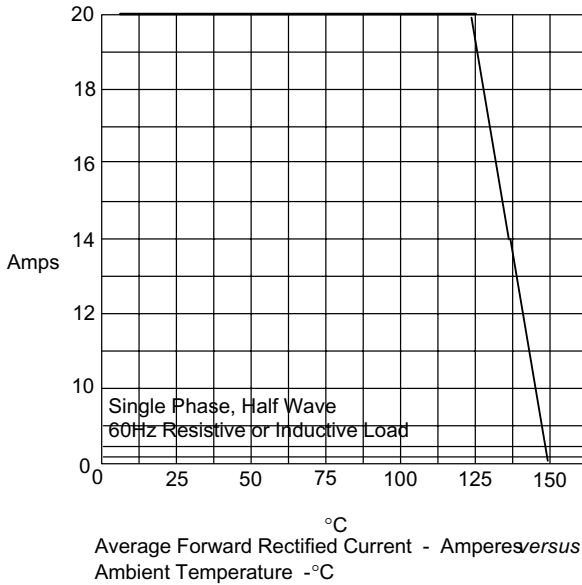


Figure 4  
Peak Forward Surge Current



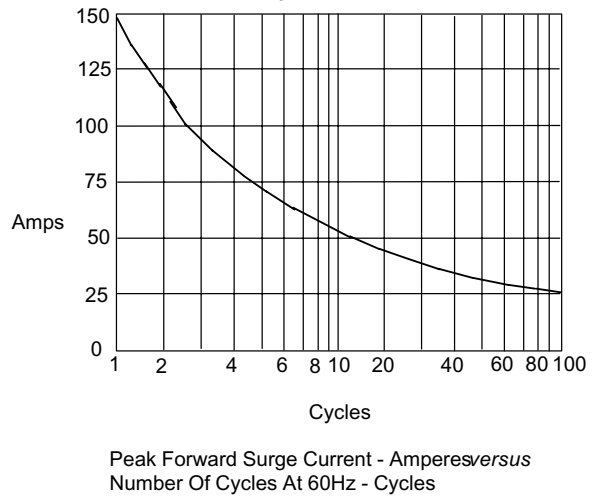

Micro Commercial Components

**\*\*\*IMPORTANT NOTICE\*\*\***

*Micro Commercial Components Corp.* reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

**\*\*\*APPLICATIONS DISCLAIMER\*\*\***

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.