

Small kVA 3 Phase Isolation Transformer

TT2046-TT2052

VA:	350, 500, 750, 1000, 1500 2000, 3000	Phase:	Three-Phase
Input Voltage:	400 Delta	Frequency:	50 Hz
Output Voltage:	480Y/277	BIL:	4 kV
Taps:	See wiring diagram	Coils:	Copper
Insulation Class:	Class F 155° C	Temp Rise:	N/A
Impedance:	2.5 - 3.5%		

NEMA 1 Enclosure

10 Full 10 Year Warranty

Feature Highlights

10 Year Warranty
UL Listed
CSA Approved

- Copper windings
- 1.5 to 2 week build time
- Solidly fixed terminals with standard combination slotted Robertson head screw connections facilitate wiring.
- Built with heat-proof insulation for compact size and long life.
- Unique bobbin-wound coils for greater efficiency, superior heat evacuation, and compact structure.

Optional Features

- NEMA 4/4x
- Encapsulation
- Other voltages/multiple tap
- Electrostatic shield

Please call us for additional options.


Small kVA 3 Phase Isolation Transformer

TT2046-TT2052

60 Hz

TT2046	350 VA
TT2047	500 VA
TT2048	750 VA
TT2049	1000 VA
TT2050	1500 VA
TT2051	2000 VA
TT2052	3000 VA

Wiring Connection		
Pri. Volts	Connect Taps	Line Leads
400	1- X1 & 2- X2 & 3 - X3	X1, X2, X3
Sec. Volts	Connect Taps	Line Leads
480 (277)	1- H1 & 2- H2 & 3 - H3	H1, H2, H3(H0)

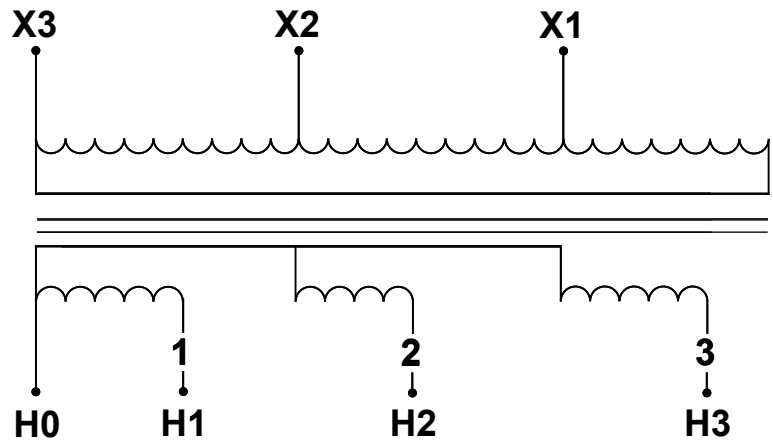


Small kVA 3 Phase Isolation Transformer

TT2046-TT2052

Enclosed Units

VA	350	500	750	1000	1500	2000	3000
Part # 60 Hz	TT2046	TT2047	TT2048	TT2049	TT2050	TT2051	TT2052
Enclosure #	1	1	2	2	2	2	2
Enclosure Weight (lbs.)	22	24	37	40	54	60	69

No. 1 ENCLOSURE (With 4 x 0.5" mounting holes)

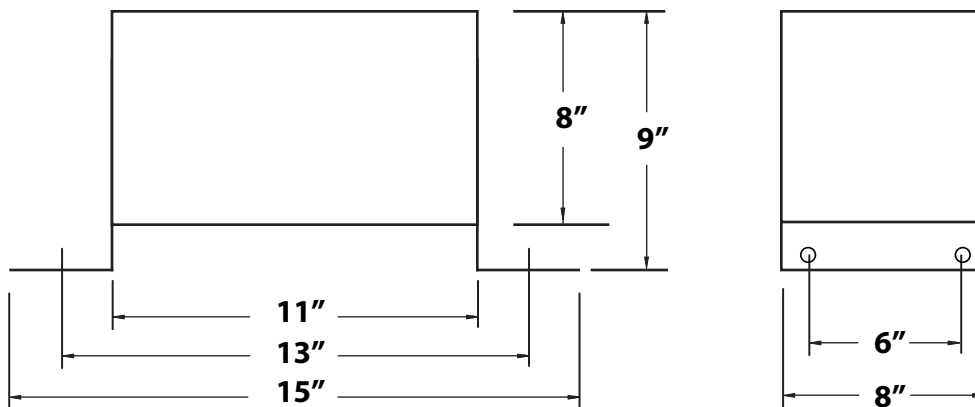

No. 2 ENCLOSURE (With 4 x 0.5" mounting holes)

