



HM9102/A/C


TONE/PULSE SWITCHABLE DIALER WITH REDIAL

Features

- Tone/Pulse switchable Dialer.
- One 32-digit memory for the last number redial. (HM9102 only; others: 31-digit)
- Auto pause access for PBX operation; 3.6 sec per pause. (2sec., 3.2sec. pause time can be obtained by metal option.)
- Pulse to tone key (P→T) for toll service operation, automatically insert a pause time per P→T.
- Use 3.579545MHz crystal.
- Flash Key is available in PBX; Flash time is 600ms & 100ms by M/B controller.
- In pulse mode *, # can be used as pause & redial function.
- Minimum tone duration=100ms and minimum intertone pause=106ms for rapid key-in.
- M/B PIN SELECT TO 3 TYPES:

	M/B	Pulse rate	Flash time	M/B rate
HM9102/A	OPEN	20PPS	600ms	33:66
	V _{SS}	10PPS	600ms	40:60
	V _{DD}	10PPS	100ms	33:66
	M/B	Pulse rate	Flash time	M/B rate
HM9102C	OPEN	20PPS	600ms	33:66
	V _{SS}	10PPS	100ms	40:60
	V _{DD}	10PPS	600ms	33:66

Pin Assignment

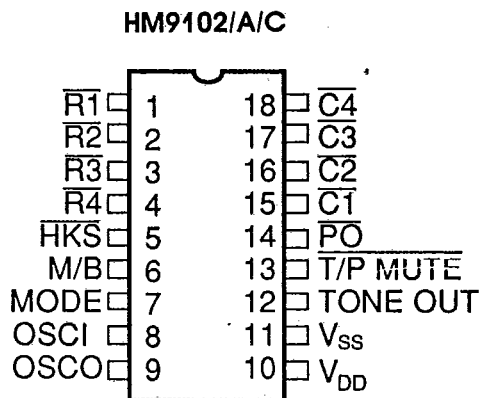

Keyboard Scheme

COL1	COL2	COL3	COL4	
1	2	3	P→T	ROW1
4	5	6	F	ROW2
7	8	9	P	ROW3
*	0	#	R	ROW4

P→T: Pulse to Tone Key F: Flash
 P: Pause R: Redial
 *: Pause (In pulse mode) #: Redial (In pulse mode)

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.